



Product Data Sheet

Product Type

Speaker Connector

Product Model

SL4MP(01)

Customer Name

Manufacturer	Prepared	Checked	Approved

Customer	Received	Checked	Confirmed



Product Data Sheet

Product Type	Speaker Connector	
Product Model	SL4MP(01)	
Product Features		
➤ 4 pole socket speaker connector, black D-size plastic flange ➤ Current rating up to 30 A rms ➤ Extremely robust and easy to terminate ➤ D-type panel cut-out for easy mounting on standard panels		



Product Data Sheet

Product Parameters

Item	Specification
Connection Type	Speaker
Gender	Male

Electrical Parameters

Item	Specification
Number of Contacts	4
Rated Current	30A rms
Rated Voltage	250V AC
Contact Resistance	$\leq 3 \text{ m}\Omega$
Dielectric Strength	4KV DC
Insulation Resistance	$> 1 \text{ G}\Omega$



Product Data Sheet

Mechanical Parameters

Item	Specification
Service Life	> 1000 mating cycles


Material and Environmental Parameters

Item	Specification
Housing	PA
Contacts	Cu alloy
Contact plating	Ag
Flame-retardant grade	UL 94-V0
Temperature range	-30°C ~ +80°C



Product Data Sheet

Product Drawing

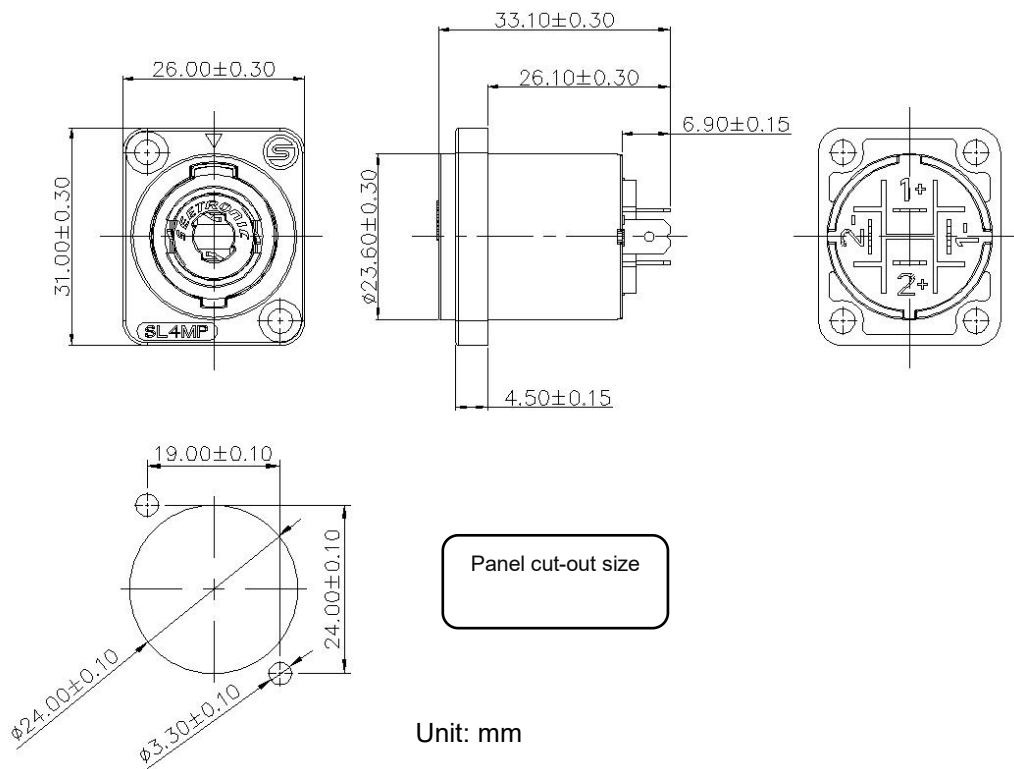

Packaging Method

Blister box packaging

20 pcs per blister box, 100 pcs per inner carton, 5 inner cartons per master carton (500 pcs per master carton)

Accessory


- | | |
|--|--|
| ☒ No accessories | ☐ Back fastener plate |
| ☐ Screws and Nuts | ☐ Other |




Product Data Sheet

Assembly Instructions

Install on the front of the panel. Tighten the screws with 0.5 Nm torque in clockwise direction.

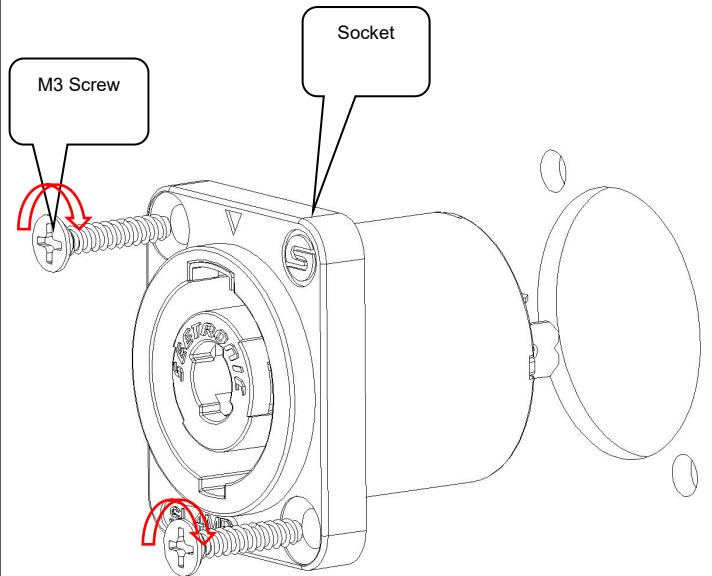

Type of Terminals

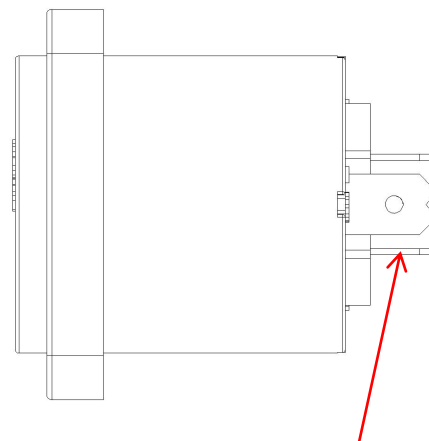

Soldering / plugging 4.8x0.5 terminals

